



**AMBER**  **WINCHLINE**



**Fiber**

Nylon monofilament and high tenacity nylon multifilament

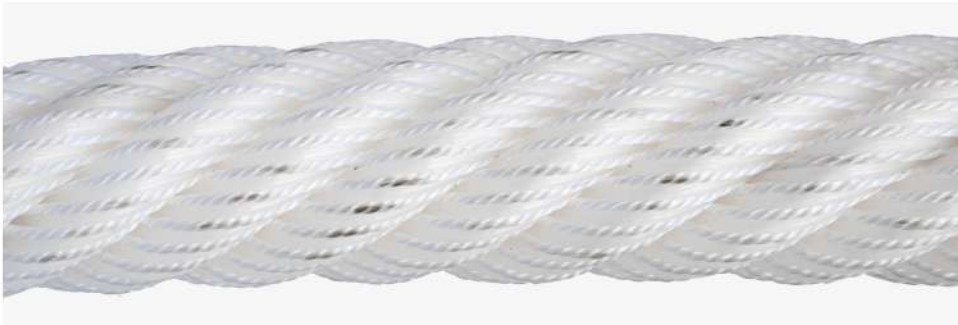

**Construction**

6-strand cross lay rope + core



**Specific gravity**

1.14



**Elongation**

22%



**Melting point**

218°C



**UV resistance**

Excellent



**Abrasion resistance**

Excellent



**Application**

Mooring, towing, winch line, anchor line and other heavy duty applications.

**Features**

High deformation & fatigue resistance

Diameter (mm)	Circ (inch)	Weight/220m (kg)	Breaking strength (t)	LDBF MEG4 (t)
40	5	217.8	31.4	28.3
44	5-1/2	253	39.9	35.9
48	6	301.4	47.5	42.8
52	6-1/2	354.2	51.3	46.2
56	7	411.4	63.7	57.3
60	7-1/2	470.8	68.4	61.6
64	8	536.8	77.9	70.1
68	8-1/2	607.2	89.3	80.4
72	9	679.8	102.6	92.3
80	10	838.2	119.7	107.7

All products are produced in accordance with OCIMF and MEG4 guidelines and IACS approved